

1500 EX



www.ommelift.com

Trailer lift - Articulated

Dealer:

**STATECH**[®]


STATECH s.r.o.

Počapelská 346
277 01, Dolní Beřkovice, Czech Republic
+420 728 270 270
info@statech.cz
www.statech.cz

OMMELIFT



1500 EX Trailer lift

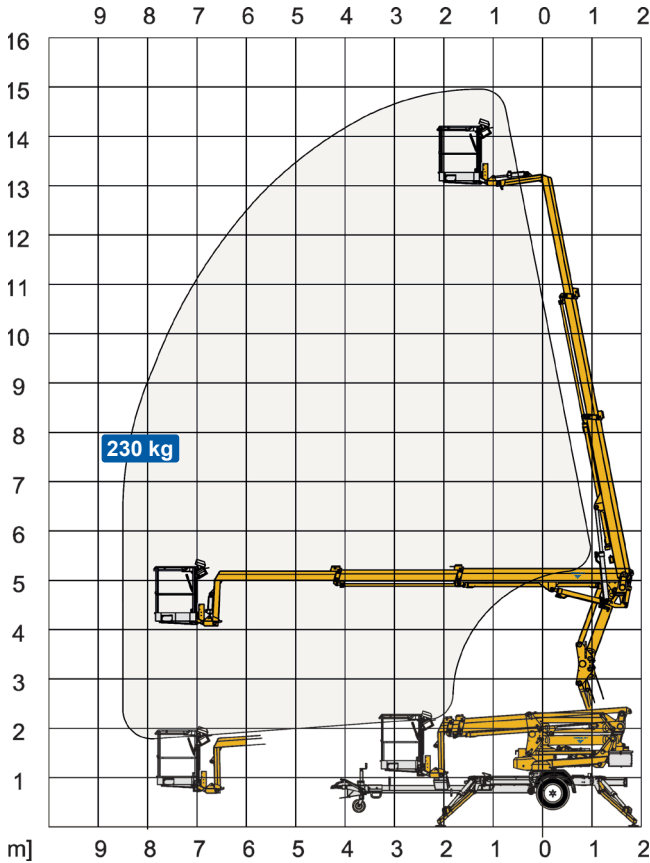

Technical Data:		1500 EX	1500 EXB	1500 EXB-Li
Max. working height		15.0 m		
Max. platform height		13.0 m		
Max. outreach		8.5 m		
Up and over clearance		5.0 m		
Angle boom length (boom + basket)		2.0 m		
Jib length (jib + basket)		-		
Vertical jib rotation		-		
Turret rotation		± 400°		
Basket rotation		± 50°		
Max. basket load		230 kg		
Basket size		1.25 x 0.8 x 1.1 m		
Stabilizer pad size		ø200 mm		
Engine	⁵ Petrol ⁶ Diesel	230V / 16A	BATTERY	Lithium
Fuel tank capacity		⁵ Option ⁶		
Generator				
Battery pack		24V/139Ah/5h	24V/120Ah	
Charger		24 V / 15 A	24 V / 40 A	
Double charger system		Optional	Optional	
Elec. descent		Optional		
See www.ommelift.com for more features and options				
Self-propulsion with hydraulic engagement of traction rollers		Standard		
Gradeability		14% / 8°		
Ground to tire clearance at max. set-up		Min. 300 mm (13.8% / 7.9°)		
Total weight		2000 kg	2050 kg	2000 kg
Ground pressure, outrigger pad		12.9 kg/cm ²	12.4 kg/cm ²	12.9 kg/cm ²
Ground pressure with 0.4 x 0.4 m spreader plate		0.7 kg/cm ²	0.7 kg/cm ²	0.7 kg/cm ²
Max. force, outrigger		10.5 kN	10.5 kN	10.5 kN
Hydraulic stabilizers		Standard		
Controls		2-step		
Flush basket mount		Standard		
Elec. power outlet in basket		Standard		
Tool trays in basket		Standard		

